

FULL FRAME

Single Frame
Single Glass

OPERABLE
GLASS





DETAIL SPECIFICATION

| Operation Methods | | Maximum Size | |
|------------------------|---|--------------|---------|
| | | Width | Height |
| Stacking System | | | |
| Ordinary | ✓ | 1200 mm | 4000 mm |
| Parallel | ✓ | | |
| Center | ✓ | | |
| Induction | ✓ | | |
| Folding | | | |
| Paired | ✓ | 800 mm | 3500 mm |
| Fold Side | ✓ | | |



Glass Thickness
 10 mm Non Tempered
 (STC 33)
 10 mm Tempered
 (STC 33)



Cover Finish
 - Aluminium Natural
 Anodize
 - Aluminium Powder
 Coating




Weight Approximately
 8 mm = 24 kg/m²
 10 mm = 30 kg/m²

STACKING METHODS



ORDINARY STACKING

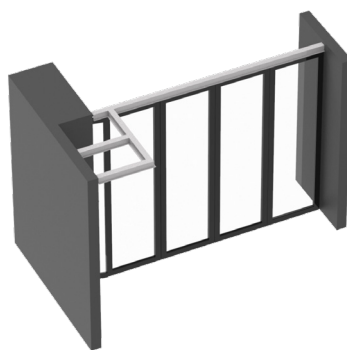

INDUCTION STACKING




PARALLEL STACKING



ORDINARY R-TYPE SYSTEM




CENTER STACKING
WITH TWO RUNNERS



DOUBLE STACKING

FOLDING METHODS

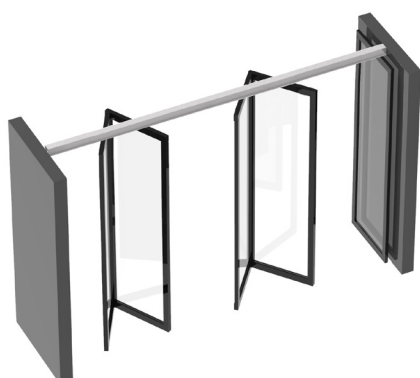


PAIRED SYSTEM




FOLD SIDE 4+1


STACKING AREA OPTIONS

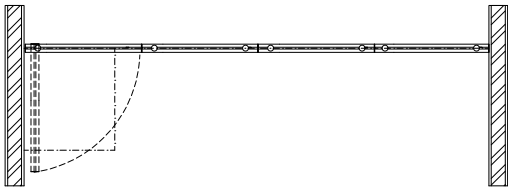


Ordinary stacking
Cross type system

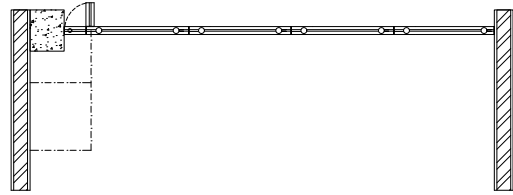


Induction stacking
Cross type system

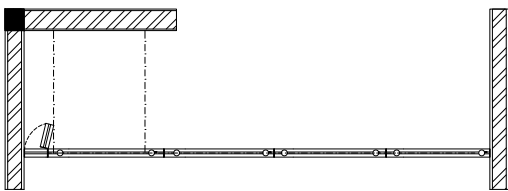


Parallel stacking
Cross type system

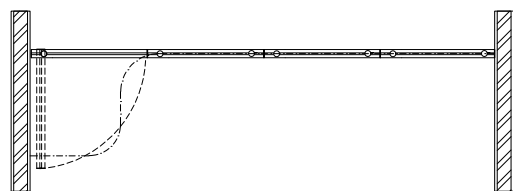


Ordinary stacking
R-Type system

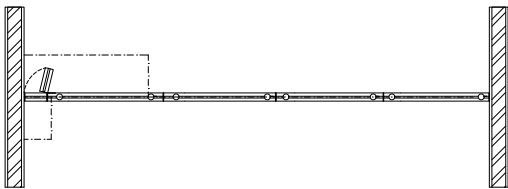


Center stacking 2 runners
Cross type system

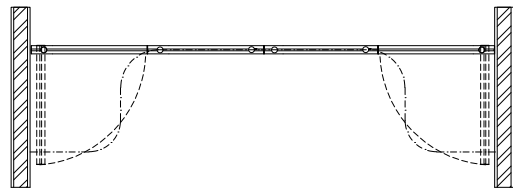

Double Stacking
R-Type system

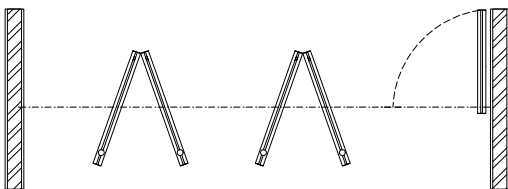

Paired system
Cross type system

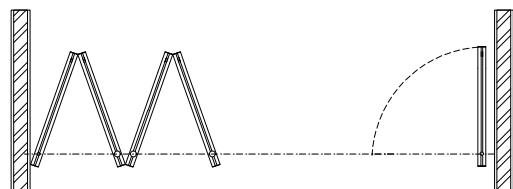


Fold side 4 + 1
R-Type system


SECTION DRAWING

SECTION DRAWING STACKING SYSTEM

VERTICAL SECTION HORIZONTAL FRAME

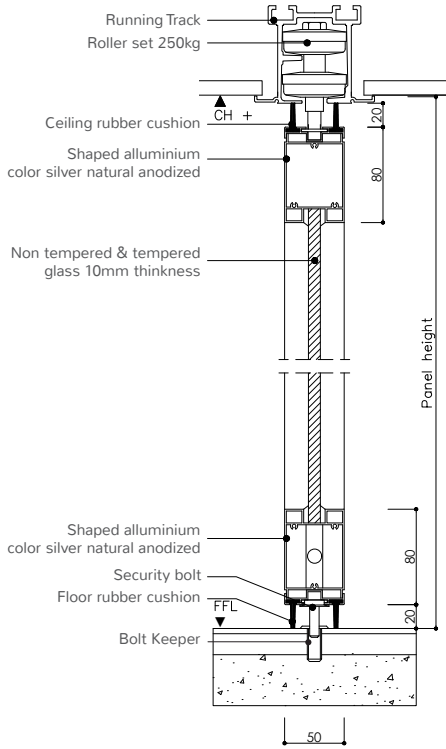


PERSPECTIVE ORDINARY STACKING

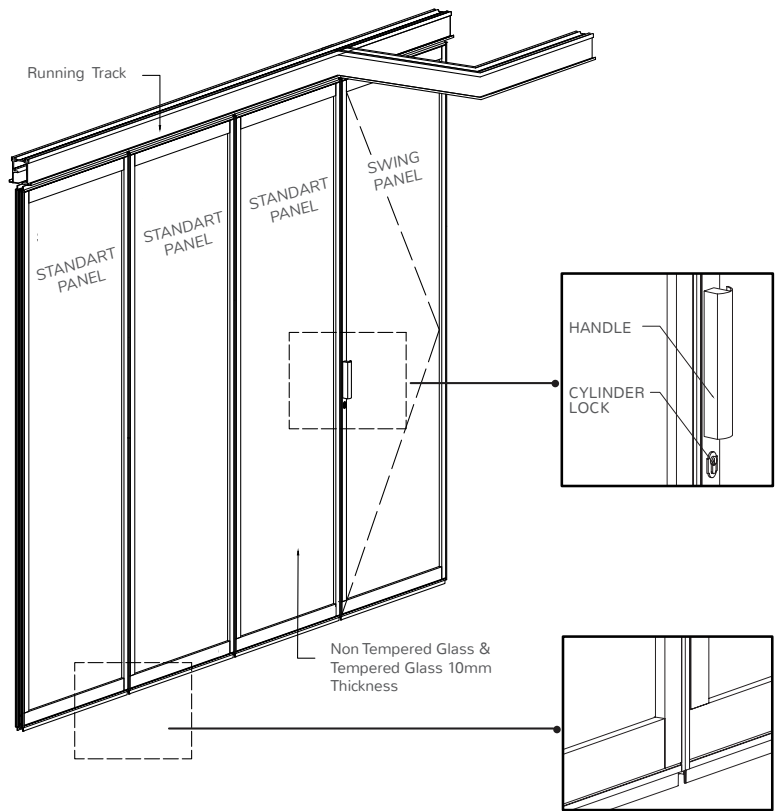


FOLDING SYSTEM

SECTION DRAWING FOLDING SYSTEM

VERTICAL SECTION HORIZONTAL FRAME

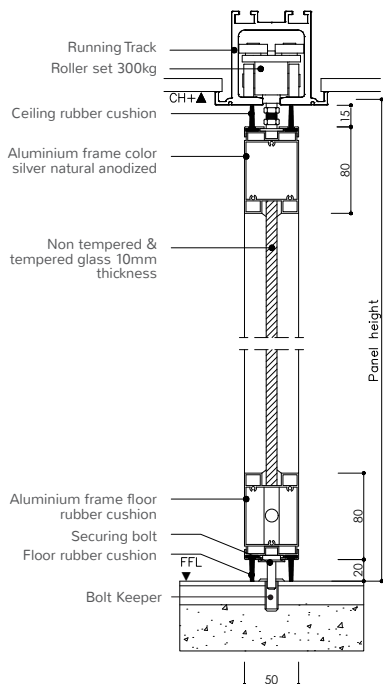


PERSPECTIVE PAIRED STACKING

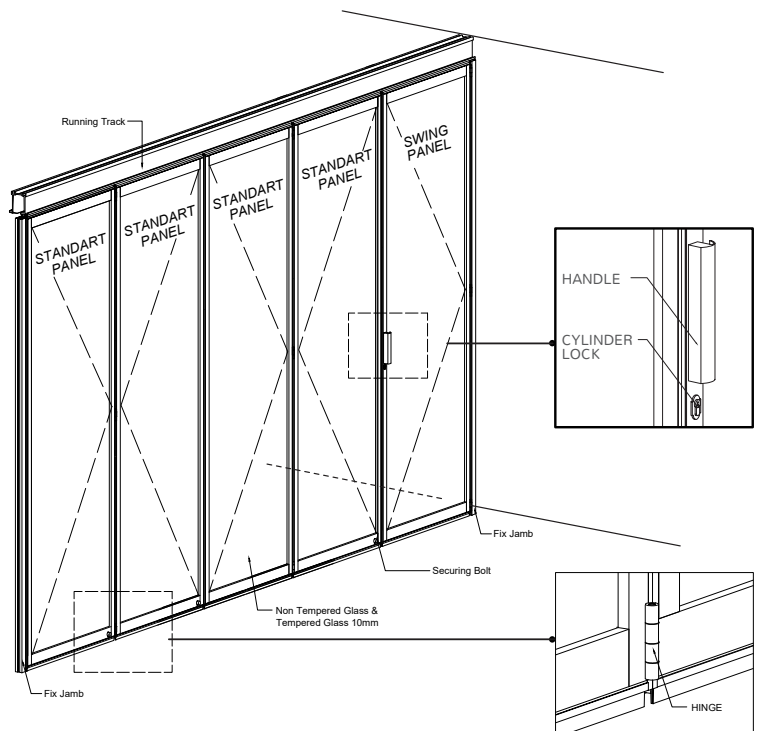


CONSTRUCTION SUPPORT

FOR STACKING AND FOLDING SYSTEMS


CONCRETE

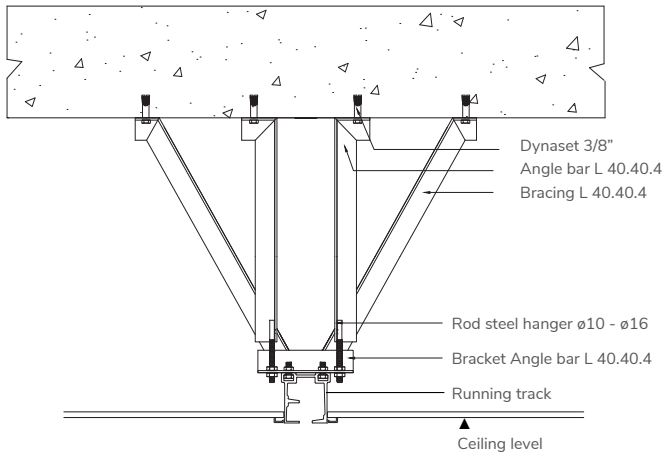


NON CONCRETE

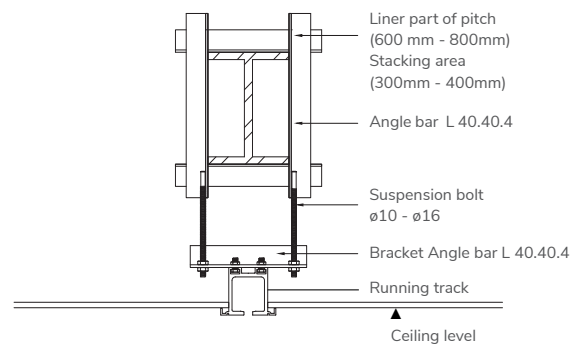

ACCESSORIES STANDARD



Handle





Bolt Set




Cylinder Lock



SPECIFICATION OF RAILS & RUNNERS

CROSS TYPE

| TYPE | MATERIAL | IMAGE | |
|--------|---|---|---|
| 200 Kg | <p>Running Track Aluminium anodized H - base 3 - 5 thk</p> <p>Roller Set Base : MC Blue Bearing : Ø32- 2 pcs H. Density PTFE - Bearing Cover : Ø51 - 2 pcs Hanger Bolt : Based Ring Steel Ø12</p> | Roller Set | Running Track |
| | |  |  |

| | | | |
|--------|---|---|---|
| 300 Kg | <p>Running Track Aluminium anodized H - base 3 - 5 thk</p> <p>Roller Set Base : MC Blue Bearing : Ø40- 2 pcs H. Density PTFE - Bearing Cover : Ø65- 2 pcs Hanger Bolt : Steel Ø14</p> | Roller Set | Running Track |
| | |  |  |

R - TYPE

| TYPE | MATERIAL | IMAGE | |
|--------|--|---|---|
| 300 Kg | <p>Running Track Aluminium anodized H - base 6 thk</p> <p>Roller Set Base : Steel Bearing : Ø35 - 4 pcs Ø52 - 4 pcs Hanger Bolt : Based Ring Steel Ø16</p> | Roller Set | Running Track |
| | |  |  |



www.sandei.co.id

 sandei_official



Visit Our Website